TRAKA AUTOMOTIVE
SAGEM ENROLMENT MODULE INSTALLATION

traka
ASSA ABLOY

Install Sagem Drivers
Register Driver Files
Connect USB Enrolment Module
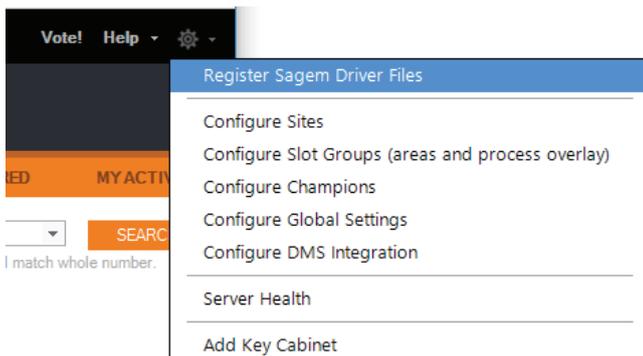
Experience a safer
and more open world

INSTALL SAGEM DRIVERS

1. Connect to the Traka Automotive server (normally via IP address in Windows Explorer)

2. Once connected to the server the Setup.Client folder should be found (as it is shared)

3. In the folder open the Sagem MorphoSmart USB Driver.zip file (or the 64bit version if using 64bit Windows)

4. Run the setup program and ensure it completes successfully.

|		
📁 MorphoSmart USB Driver x64	15/09/2016 10:51	File folder
🗎 Data1.cab	25/09/2008 10:26	WinRAR archive
🗎 Sagem MorphoSmart USB 64 bits Drivers.msi	25/09/2008 10:26	Windows Installer ...
🗎 setup.exe	25/09/2008 10:26	Application

REGISTER DRIVER FILES

1. Launch the Traka Automotive Desktop Application.

2. Click the Configure menu (cog icon).

3. Select the Register Sagem Driver Files option.

Vote!	Help ▾	⚙ ▾
		Register Sagem Driver Files
		Configure Sites
		Configure Slot Groups (areas and process overlay)
		Configure Champions
RED	MY ACTIV	Configure Global Settings
		Configure DMS Integration
▾	SEARC	
match whole number.		Server Health
		Add Key Cabinet

4. Click Yes on the popup that appears asking 'Do you want the following program to make changes to this computer...'

User Account Control

Do you want to allow the following program to make changes to this computer?

Program name: Microsoft(C) Register Server
Verified publisher: **Microsoft Windows**

ⓥ Show details   [Yes]   [No]

Change when these notifications appear

5. Click OK on the Registration succeeded popup.

Registration succeeded.

[OK]

CONNECT USB ENROLMENT MODULE

1. Plug the USB module into the computer and wait whilst Windows configures the device.

2. You should hear the Windows USB connection sound and the light on the reader area should briefly flash red.

3. You can now use the capture template functions when enrolling or editing users in the Desktop Application.

4. If you have issues, please unplug and then plug the reader back in.